

VITUS 46SCI

- Industrial Panel PC in metal cased
- Fanless solution
- Display LCD 46" Full HD - LED backlight
- Resolution UXGA 1920 x 1080
- IP65 on front panel
- Laminated glazing 6.7 mm non glare
- Intel® Core™ i5-5350U (1.8GHz)
- Internal industrial power supply
- Available with IR Multi-touch touch screen




Metal chassis
IP65 on front

I/O protection trap


Fanless chassis

I/O ports

- | | |
|----------------|---------------------|
| 1 - Line out | 12 - COM 2 |
| 2 - Line in | 13 - COM 3 (option) |
| 3 - Micro | 14 - Power |
| 4 - USB 2.0 | 15 - Keylock |
| 5 - COM 1 | |
| 6 - USB 3.0 | |
| 7 - USB 3.0 | |
| 8 - Ethernet 1 | |
| 9 - Ethernet 2 | |
| 10 - DVI-I | |
| 11 - ATX Power | |

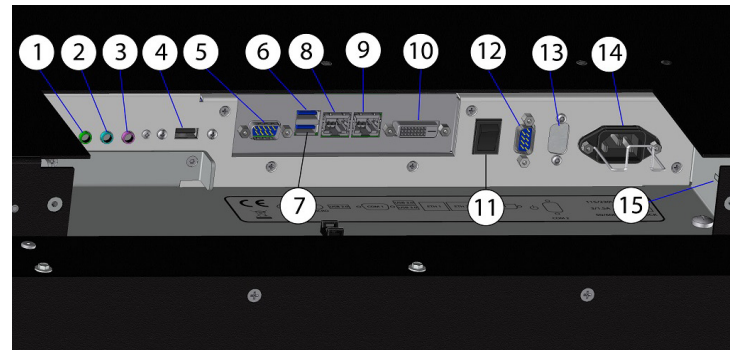


Mechanical Drawing

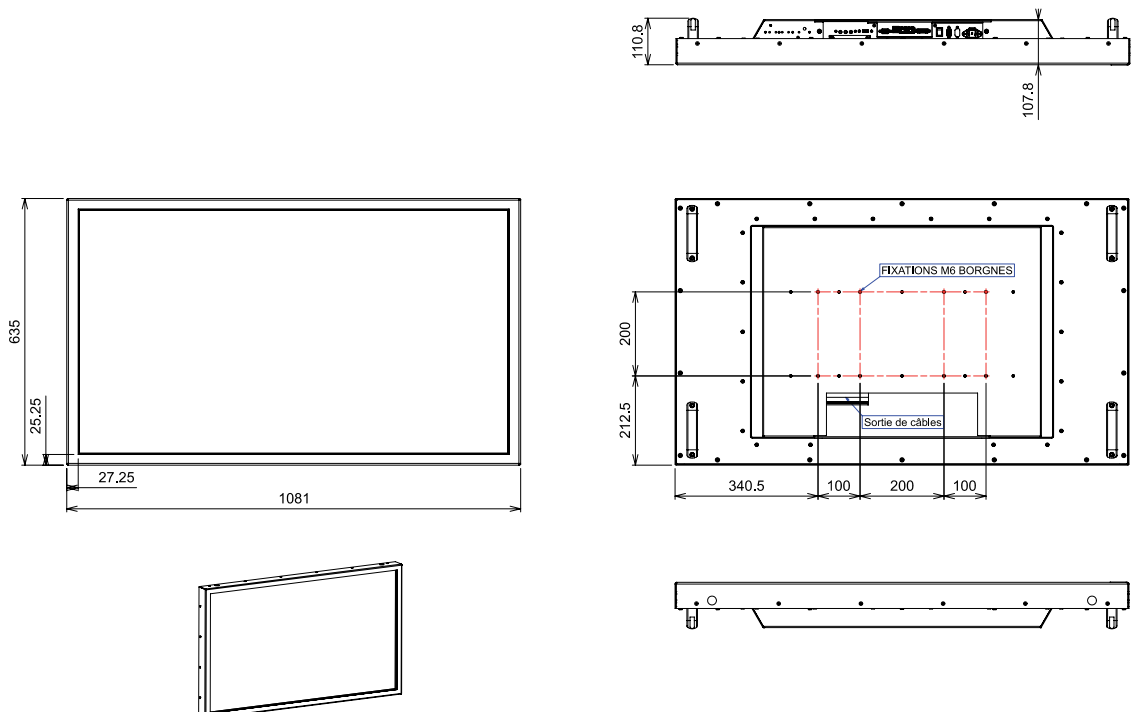

Specifications

Chassis	Construction Chassis	2 mm thick
	Colors	black paint RAL-9005
	Mounting	VESA 200x200 / VESA 400x200 compatible
	Anti-reflection Glass	6.7mm laminated glazing - non glare no touch version
Display	Protection	IP65 on front panel
	LCD Size	46" - Full HD - 16:9
	Active area	1018 x 572 mm
	Resolution	1920 x 1080 UXGA
	LCD Color	16.7 millions
	Pixel Pitch	0.53 mm
	Brightness	500 cd/m2
	Contrast Ratio	3000 : 1
Touch Screen	Viewing Angle	+/- 89°
	Technology	IR Multitouch (6 touch)
CPU	CPU	Intel® Core™ i5-5350U (1.8GHz)
	Chipset	Intel® Core™ i U-series 5 ^{ème} Generation
Operating System	RAM	2 x DDR3L-1600 SO-DIMM (max. 16.0 Go)
	Drive Bay	Windows 7 / 8.1 - Linux on demand
I/O (trap protection)	HDD/ SSD	1 x 2" 1/2 SATA - Easy-Maintenance
	Option	2 x USB 3.0 - 1 x USB 2.0 - 2 x RS-232 - 1 x DVI-D
		2 x Gigabit Ethernet 100/1000Mbps (RJ45)
		1 x Audio(Micro/line In/Line Out) - 1 x Keypad
Button / Indicator	Port RS-422/485 - RS-422/485 isolated	ATX On/Off switch button
System Cooling	Under trap protection	Fanless
Dimensions	Dimension WxHxD (mm)	1081 x 635 x 110.8
	Weight (kg)	40
Industrial Power Supply	AC~	115/230VAC - 3/1.5A - 50/60Hz. Power consumption: 120 W max.
Safety & EMC	Security	EN60950-1
	EMC	EN55022, EN61000-3-2, EN61000-3-3, EN55024, EN-61000-4-2, EN-61000-4-3, EN-61000-4-4, EN-61000-4-5, EN-61000-4-6, EN-61000-4-8, EN-61000-4-11
Environnement	Operating Temperature	0° ~ + 35°C
	Storage Temperature	- 20 + 60°C
	Relative Humidity	5 95 %
Warranty	2 years Parts & Labour return to base as standard	
Options & Accessories	IR (in end of items serie)	Multitouch IR touch screen
	OPT/ETHRABGN/V46	Internal Wifi Solution 802.11 a/b/g/n - 1 rugged antenna
	OPT/BTH/USB/V46	Option BLUETOOTH
	XSUPPORTMUR/26-52	Wallmount support - security lock possible
	XSUPPORTPLAF/32-60	Ceiling mount solution



Wallmount support



Ceiling mount solution



Rugged Wifi solution



IR Multi-touch touch screen

Ordering Information

VITUS 46SCI/AC/NG Fanless industrial Panel PC Fanless inmetal cased - LCD TFT 46" Full HD - Intel® Core™ i5-5350U - 230VAC

VITUS 46SCI/IR/AC Fanless industrial Panel PC Fanless inmetal cased - LCD TFT 46" Full HD - Intel® Core™ i5-5350U - IR Multi-touch touch screen - 230VAC

Please ask for additional information about **Options & Accessories**.

Packing list

- 1 Power cord CE22 1.80 m (AC~ version)
- 1 Utility CD includes: User's manual
- 1 Utility CD includes: Drivers
- 1 Software Licence (label format)
- 1 Production&Traceability datasheet